


SUBMITTAL

Part Number
2000104KD (RapidFit)

SUBMITTED TO _____
COMPANY _____
JOB NAME _____
EQUIPMENT _____
SIGNATURE _____
DATE _____



RAPID-FIT ADAPTER SUBMITTAL 2000104ASD/KD

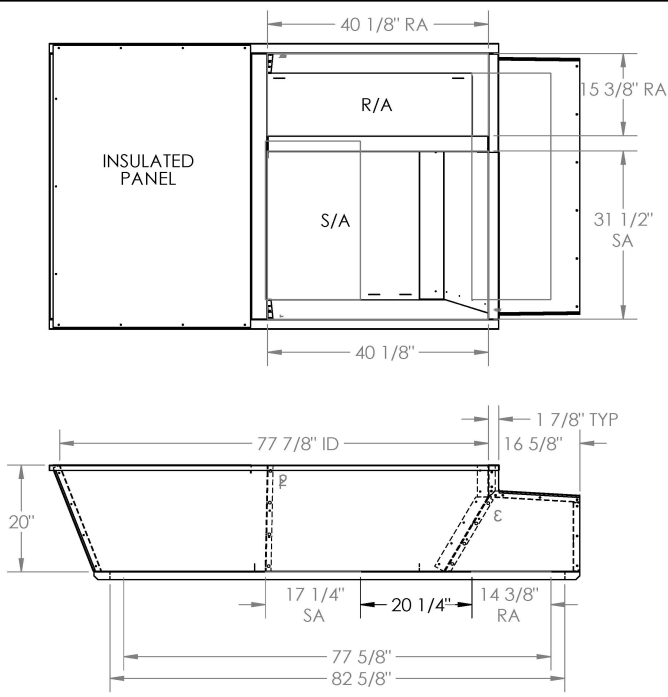

Top View Dimensions:
Overall Width: 40 1/8" RA
Overall Height: 31 1/2" SA
Internal Width: 40 1/8"
Internal Height: 15 3/8" RA
Labels: INSULATED PANEL, R/A, S/A

Side View Dimensions:
Overall Length: 77 7/8" ID
Overall Height: 20"
Internal Length: 77 5/8"
Internal Height: 82 5/8"
Labels: 17 1/4" SA, 20 1/4", 14 3/8" RA, 1 7/8" TYP, 16 5/8"

Front View Dimensions:
Overall Width: 49 3/4" ID
Overall Height: 29 11/16" SA
Internal Width: 42 3/8" RA
Internal Height: 47 3/8"

FEATURES:

1. CURB ADAPTER CONSTRUCTED OF HEAVY GAUGE GALVANIZED STEEL
2. MULTIPLE PIECE SCREW TOGETHER CONSTRUCTION (FULLY ASSEMBLED OR KNOCK DOWN AVAILABLE)
3. GASKETING IS PROVIDED FOR UNIT TO CURB ADAPTER SEALING
4. SUPPLY AND RETURN TRANSITIONS INCLUDED.
5. CURB ADAPTER IS FULLY INSULATED.
6. FOR KNOCK DOWN VERSION, TEK SCREWS, CAULKING & SPRAY BOTTLE INCLUDED (WATER ACTIVATED GLUE INSULATION)

Approved By: _____
Date: _____

MATERIAL: 18 GA GALVANIZED STEEL
WEIGHT: 148 LBS

OLD UNIT: TRANE TCD/YCD061-091
NEW UNIT: CARRIER 3A

FEATURES

- ONE PIECE WELDED CONSTRUCTION
- FACTORY INSTALLED SUPPLY TRANSITIONS
- FULLY INSULATED
- DESIGNED FOR EVEN WEIGHT DISTRIBUTION
- FABRICATED OF HEAVY GAUGE G90 GALVANIZED STEEL
- ALL WELDS SPRAYED WITH GALVANIZING COMPOUND
- GASKET PROVIDED FOR UNIT TO ADAPTER SEALING

CAMBRIDGEPORT STRONGLY RECOMMENDS CONFIRMING THE DIMENSIONS ON THIS SUBMITTAL

CURB ADAPTERS ARE BASED ON UNIT MANUFACTURERS STANDARD CURB DIMENSIONS.
CAMBRIDGEPORT CANNOT BE RESPONSIBLE FOR ANY DEVIATIONS FROM FACTORY DIMENSIONS OR INCORRECT MODEL NUMBERS.