

SUBMITTAL

Part Number
2009094ASD (RapidFit)

SUBMITTED TO _____
COMPANY _____
JOB NAME _____
EQUIPMENT _____
SIGNATURE _____
DATE _____



RAPID-FIT ADAPTER SUBMITTAL 2009094ASD/KD


FEATURES:

1. CURB ADAPTER CONSTRUCTED OF HEAVY GAUGE GALVANIZED STEEL
2. MULTIPLE PIECE SCREW TOGETHER CONSTRUCTION (FULLY ASSEMBLED OR KNOCK DOWN AVAILABLE)
3. GASKETING IS PROVIDED FOR UNIT TO CURB ADAPTER SEALING
4. SUPPLY AND RETURN TRANSITIONS INCLUDED.
5. CURB ADAPTER IS FULLY INSULATED.
6. FOR KNOCK DOWN VERSION, TEK SCREWS, CAULKING & SPRAY BOTTLE INCLUDED (WATER ACTIVATED GLUE INSULATION)

Approved By: _____
Date: _____

MATERIAL: 16 GA GALVANIZED STEEL
WEIGHT: 253 LBS

OLD UNIT: CARRIER 10A
NEW UNIT: CARRIER 47A

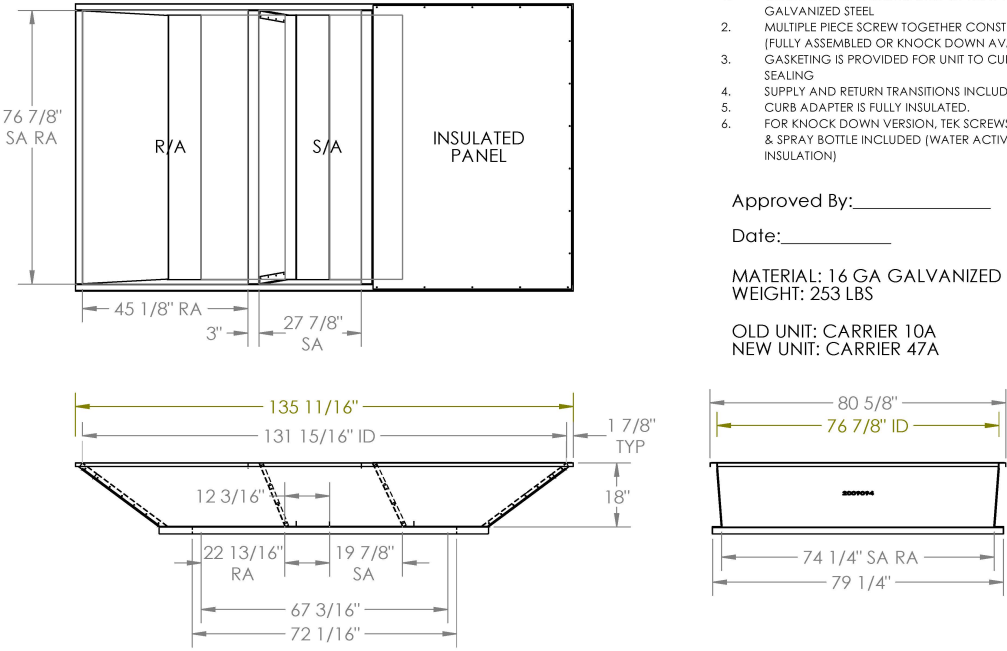

The technical drawing includes a top view and a side view of the Rapid-Fit Adapter. The top view shows a rectangular unit with a total width of 135 11/16" and an internal width of 131 15/16". It is divided into three sections: R/A (Return Adapter) with a width of 45 1/8", a 3" gap, and S/A (Supply Adapter) with a width of 27 7/8". The side view shows a trapezoidal profile with a top width of 80 5/8", an internal top width of 76 7/8", and a bottom width of 74 1/4". The height is 18". Other dimensions include a 1 7/8" typical thickness, a 12 3/16" internal width, and a 22 13/16" RA (Return Adapter) section. The bottom view shows a total width of 72 1/16" and a central section of 67 3/16".

FEATURES

ONE PIECE WELDED CONSTRUCTION

FACTORY INSTALLED SUPPLY TRANSITIONS

FULLY INSULATED

DESIGNED FOR EVEN WEIGHT DISTRIBUTION

FABRICATED OF HEAVY GAUGE G90 GALVANIZED STEEL

ALL WELDS SPRAYED WITH GALVANIZING COMPOUND

GASKET PROVIDED FOR UNIT TO ADAPTER SEALING

CAMBRIDGEPORT STRONGLY RECOMMENDS CONFIRMING THE DIMENSIONS ON THIS SUBMITTAL

CURB ADAPTERS ARE BASED ON UNIT MANUFACTURERS STANDARD CURB DIMENSIONS.
CAMBRIDGEPORT CANNOT BE RESPONSIBLE FOR ANY DEVIATIONS FROM FACTORY DIMENSIONS OR INCORRECT MODEL NUMBERS.